



Miller DuraHoist™ Safety Systems

- Portable Confined Space System designed for manhole and confined space entry/retrieval and fall arrest applications.
- Portable Fall Arrest Post provides three independent swivel tie-off points for fall arrest anchorage.







Miller DuraHoist Portable Confined Space System

Designed for manhole and confined space entry/retrieval and fall arrest applications. The modular design allows the use of components in various configurations and applications. Multiple winches and/or lifeline systems may be mounted as required. Lightweight, manageable components for easy storage, transport and set-up. No tools required for assembly.

<u>PA</u>	GE
Complete Four-Piece Hoist/Winch System	3
Adjustable Mast Options	3
Portable & Fixed Base Options	4
Vehicle Hitch Mounts	5
Winch & Hoist Mounting Brackets	5
Accessories	. 5



Miller DuraHoist Portable Fall Arrest Post & Accessories

Provides three independent swivel tie-off points for fall arrest anchorage. Three-stage/four-position telescoping design and aluminum construction for easy transportation and set-up. The leveling screws allow the system to be plumbed to vertical for proper working stability on inclines up to 15 degrees. The post also provides Horizontal Lifeline (HLL) capabilities using the HLL Anchor Ring.

Portable Fall Arrest Post & Extension Post	6
Rescue/Material Handling Davit Arm	6
Miller TechLine™ Temporary Horizontal Lifeline Kits	7
Anchor Base & Anchor Plates	7
Winch & Hoist Mounting Brackets	7
Accessories	7

DACE

DACE

Hoists/Winches

	FAUE
Miller ManHandler [®] Hoists	Back Cover
Miller MightEvac [®] Self-Retracting Lifelines (SRL)	
w/Emergency Retrieval Hoist	Back Cover

Meets all applicable OSHA and ANSI standards.

Complete Four-Piece Hoist / Winch System

- Designed for manhole and confined space entry/retrieval and fall arrest applications
- System breaks down into four lightweight aluminum components for easy storage, transport and set-up. No tools required for assembly.
- Modular design allows the use of various fixed and portable bases and an optional mast with extensions. Multiple winches and/or lifeline systems may be mounted as required.
- Suggested Applications:
 - Public Utilities: Vault and manhole entry, pump/lift/valve stations, water treatment and wastewater industries
 - General Industry (Food, Chemical, Pulp & Paper):
 Elevated manholes, storage tanks, platforms/mezzanines, underground vaults, clarifier tanks, pre-heaters


Overall system height adjusts from 79-in. (2.01m) to 100-in. (2.54m) Mast offset adjusts from 12-in. (0.30m) to 29-in. (0.74m)



SKU Description

310	Description	weight
DH-1/	Four-piece system with ManHandler hoist/winch w/65-ft. (20m) of 3/16-in. (4.76mm) galvanized steel cable	133.5 lbs. <i>(60.6kg)</i>
DH-2/	Four-piece system without ManHandler hoist/winch	91 lbs. <i>(41.3kg)</i>

Adjustable Mast Options

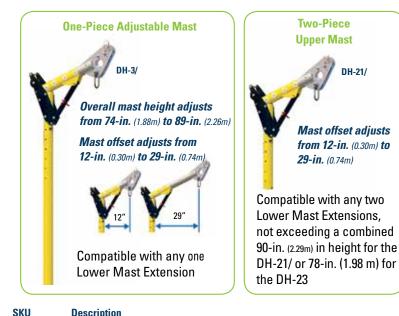

Lower Mast Extensions

Woight

Extensions provide the flexibility to change overall mast height from 41-in. (1.04m) to 146-in. (3.71m)

21-in. (0.53m) Lower Mast Extension DH-22/21

Four-piece system with

DH-1/

ManHandler hoist/winch

- 33-in. (0.84m) Lower Mast Extension DH-22/33
- 45-in. (1.14m) Lower Mast Extension DH-22/45
- 57-in. (1.45m) Lower Mast Extension DH-22/57



Weight

UNU	beschipten	worgin
DH-3/	One-Piece Adjustable Mast	29 lbs. (13.2kg)
DH-21/	Upper Mast	23 lbs. (10.4kg)
DH-23	30-in. (.76m) to 48-in. (1.22m) Adjustable Offset Upper Mast	29 lbs. (13.2kg)
DH-22/21	21-in. (.53m) Lower Mast Extension	14 lbs. (6.4kg)
DH-22/33	33-in. (.84m) Lower Mast Extension	17 lbs. (7.7kg)
DH-22/45	45-in. (1.14m) Lower Mast Extension	20 lbs. (9.1kg)
DH-22/57	57-in. (1.45m) Lower Mast Extension	23 lbs. (10.4kg)

4		

Portable & Fixed Base Options

All of the following bases are compatible with all Adjustable Mast Options. All base options include PVC liner.



Three-Piece Portable Base DH-4/ – Maximum 29-in. (.74 m) offset DH-24 – Maximum 48-in. (1.22 m) offset Three lightweight aluminum components for easy transport. Features adjustable aluminum screws and a built-in level indicator for easy set-up on uneven surfaces.



Barrel Mount Sleeve w/3.5-in. (.09m) Opening DH-5/

Eight independent clamping screws allow temporary installations over edges of shoring cans, walls and other structures.



Adjustable Barrel Mount Sleeve DH-6/

Designed for shoring, wall and parapet applications where frequent set-up over varying wall thicknesses is required. Accommodates wall thicknesses up to a max. of 24-in. (0.61m).



Floor Mount Sleeve DH-72P/& DH-7SS/ Mounts to horizontal concrete or steel structures.



No tools required for assembly.

Wall Mount Sleeve DH-8ZP/ & DH-8SS/

Mounts to vertical concrete or steel structures. Compact design creates minimal intrusion into work space.



Core Mount Sleeve DH-9ZP/ & DH-9SS/ Designed for slip-in installation into a 4-in. (0.10m) diameter core hole in concrete or in an existing steel structure.



Manhole Collar DH-11/

Designed for applications involving frequent set-ups over similarly-sized access openings. Simply slip collar into sewer manhole, tank hatch or other opening.



Flush Floor Mount Sleeve DH-20ZP/ & DH-20SS/

Eliminates the potential trip hazard presented by other floor mount sleeves. Installs into a 4-in. (0.10m) diameter core hole in concrete or in an existing steel structure.

SKU	Description	Weight
DH-4/	Three-Piece Portable Base, Lightweight Powder-coated Aluminum	61 lbs. <i>(27.7kg)</i>
DH-5/	Barrel Mount Sleeve w/3.5-in. <i>(0.09m)</i> Opening, Zinc-plated, Mild Steel	36 lbs. <i>(16.3kg)</i>
DH-6/	Adjustable Barrel Mount Sleeve, Anodized Welded Aluminum w/Zinc-plated Steel Hardware	56 lbs. <i>(25.4kg)</i>
DH-7ZP/	Floor Mount Sleeve, Zinc-plated, Mild Steel	13 lbs. <i>(5.9kg)</i>
DH-7SS/	Floor Mount Sleeve, 304 Stainless Steel	13.5 lbs. <i>(6.1kg)</i>
DH-8ZP/	Wall Mount Sleeve, Zinc-plated, Mild Steel	12 lbs. <i>(5.4kg)</i>
DH-8SS/	Wall Mount Sleeve, 304 Stainless Steel	13 lbs. <i>(5.9kg)</i>
DH-9ZP/	Core Mount Sleeve, Zinc-plated, Mild Steel	8 lbs. <i>(3.6kg)</i>
DH-9SS/	Core Mount Sleeve, 304 Stainless Steel	8 lbs. <i>(3.6kg)</i>
DH-11/17.5	17.5-in. (.44m) Manhole Collar for use with 18-in. to 20-in. (.46m to .51m) diameter Manways, Lightweight, Powder-coated Aluminum	26 lbs. <i>(11.8kg)</i>
DH-11/19.5	19.5-in. (.50m) Manhole Collar for use with 20-in. to 22-in. (.51m to .56m) diameter Manways, Lightweight, Powder-coated Aluminum	29.5 lbs. <i>(13.4kg)</i>
DH-11/21.5	21.5-in. (.54m) Manhole Collar for use with 22-in. to 24-in. (.56m to .61m) diameter Manways, Lightweight, Powder-coated Aluminum	33.5 lbs. <i>(15.2kg)</i>
DH-11/23.5	23.5-in. (.60m) Manhole Collar for use with 24-in. to 26-in. (.61m to .66m) diameter Manways, Lightweight, Powder-coated Aluminum	38 lbs. <i>(17.2kg)</i>
DH-11/25.5	25.5-in. (.65m) Manhole Collar for use with 26-in. to 28-in. (.66m to .71m) diameter Manways, Lightweight, Powder-coated Aluminum	43 lbs. <i>(19.5kg)</i>
DH-11/27.5	27.5-in. (.70m) Manhole Collar for use with 28-in. to 30-in. (.71m to .76m) diameter Manways, Lightweight, Powder-coated Aluminum	48 lbs. <i>(21.8kg)</i>
DH-20ZP/	Flush Floor Mount Sleeve, Zinc-plated, Mild Steel	24 lbs. <i>(10.9kg)</i>
DH-20SS/	Flush Floor Mount Sleeve, 304 Stainless Steel	25 lbs. <i>(11.3kg)</i>
Base Access	ories	
DH-10ZP/	Sleeve Cap that keeps dirt and debris from getting into the opening of various sleeve mounts, Zinc-plated, Mild Steel	1.2 lbs. <i>(0.5kg)</i>
DH-10SS/	Sleeve Cap that keeps dirt and debris from getting into the opening of various sleeve mounts, 304 Stainless Steel	0.8 lbs. <i>(0.4kg)</i>

Vehicle Hitch Mounts



Designed to install into a 2-in. (.05m) receiver on an attendant vehicle to provide a portable anchor point for confined space entry/retrieval, rescue and fall arrest applications.

and the second second		
SKU	Description	Weight
DH-12/	Vehicle Hitch Mount Sleeve	49 lbs. <i>(22.2kg)</i>
DH-13/	Vehicle Hitch Mount 2-ft. (.61m) Extension, Zinc-plated	17 lbs. <i>(7.7kg)</i>
DH-14/	Multi-Directional Bumper Receiver, Zinc-plated	8.5 lbs. <i>(3.9kg)</i>
DH-15/	Pintle Hitch Adapter, Zinc-plated	13 lbs. <i>(5.9kg)</i>
DH-16/	2-in. (.05m) Ball Hitch Adapter, Zinc-plated	19 lbs. <i>(8.6kg)</i>
DH-17/	Single Direction Bumper Receiver, Zinc-plated	7.6 lbs. <i>(3.5kg)</i>



Winch & Hoist Mounting Bracket



DH-AP-8/

DH-AB-DBI/

DH-AB-DBI/30

SKU	Description	Weight
DH-19-MILLER/	Complete Mounting Bracket Assembly for Miller Manhandler Hoist/Winch or Miller MightEvac SRL	3.1 lbs. (1.4kg)
DH-19/	Winch Mount Bracket	1.6 lbs. (0.73kg)
DH-AB-MILLER/	Adapter Bracket for Miller MightEvac SRL (Requires a DH-19/ Bracket)	1.5 lbs. <i>(0.68kg)</i>
DH-AP-8/	Flat Quick-Mount Bracket (Requires a DH-19/ Bracket)	2.5 lbs. (1.1kg)
DH-AB-DBI/	Adapter Bracket for DBI Winch or SRL (Requires a DH-19/ Bracket)	1.8 lbs. <i>(0.82kg)</i>
DH-AB-DBI/30	Adapter Bracket for DBI Winch or SRL (30 degree incline) (Requires a DH-19/ Bracket)	2.6 lbs. <i>(1.2kg)</i>

Accessories


DH-19/



DH-AB MILLER/

SKU	Description	Weight
DuraHoist Eq	uipment Cart	
DH-18/	Equipment Cart for DuraHoist Four-Piece Hoist System (DH-1/, DH-2/)	40 lbs. (18.1kg)
DH-18DC/	Dust Cover for the DuraHoist Equipment Cart	2 lbs. (0.91kg)
Wheel Kit fo	r Three-Piece Base	
DH-4WK/	Wheel Kit (Two Wheels) for the DuraHoist Three-Piece Base (DH-4/)	30 lbs. <i>(13.6kg)</i>
Carrying Bag	S	
DH-2BAG/	Set of two Carrying Bags for DuraHoist Four-Piece Hoist System (DH-2/)	6 lbs. (2.7kg)
DH-3BAG/	Carrying Bag for One-Piece Adjustable Mast (DH-3/)	6 lbs. (2.7kg)
DH-4BAG/	Carrying Bag for Three-Piece Base (DH-4/)	3.7 lbs. (1.7kg)

Portable Fall Arrest Post & Extension Post

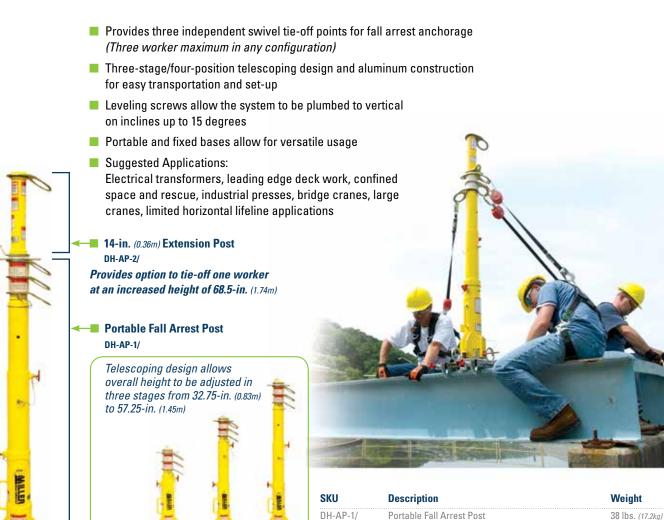

Rescue / Material Handling Davit Arm



DH-AP-2/

14-in. (.36m) Extension Post

4.5 lbs. (2.0kg)

Miller TechLine[™] Temporary Horizontal Lifeline Kits



- 5/8-in. (.02m) polyester rope lifeline
- Line adjuster/tensioner
- Connecting ring(s)
- Snap hook
- In-line shock absorber (two worker kits only)

Anchor Base & Anchor Plates

connect one or two workers		
SKU	Maximum Span	No. of Workers
HLLR1-L/30FT	30-ft. <i>(9.1m)</i>	1 worker
HLLR1-L/60FT	60-ft. (18.3m)	1 worker
HLLR2-L/30FT	30-ft. <i>(9.1m)</i>	2 worker
HLLR2-L/60FT	60-ft. (18.3m)	2 worker

Additional Horizontal Lifeline products are available; contact Miller Technical Service 800-873-5242 (press 4 for Technical Service).

Connecting Ring(s) used to





Portable I-beam **Anchor Base** Attaches to steel I-beams DH-AP-9/

Bolt-on Anchor Plate For use in concrete or steel applications (Portable or Permanent) **DH-AP-12/**

SKU	Description	Weight			
Portable A	nchor Base				
DH-AP-9/	Portable I-beam Anchor Base	56 lbs. (25.4kg)			
Portable/Fixed Anchor Plate					
DH-AP-12/	Bolt-on Anchor Plate	43 lbs. (19.5kg)			

Fixed Anchor Plates

Plate

w/Tie-off

Anchor

DH-AP-4/

Designed to be permanently welded to existing structures in locations of frequent work, or where the use of a portable base is impractical.

Plates for inclined surfaces (DH-AP-6/, DH-AP-7/) can be customized to your specific incline requirements up to a maximum of 45 degrees.



Standard Plate DH-AP-5/

HLL Anchor Rina



Plate for **Inclined Surfaces** w/Tie-off Anchor DH-AP-6/

Plate for Inclined **Surfaces** DH-AP-7/

SKU	Description	Weight
DH-AP-4/	Plate with Tie-off Anchor	11.8 lbs. <i>(5.4kg)</i>
DH-AP-5/	Standard Plate	11.6 lbs. <i>(5.3kg)</i>
DH-AP-6/	Plate for Inclined Surfaces with Tie-off Anchor	24 lbs. <i>(10.9kg)</i>
DH-AP-7/	Plate for Inclined Surfaces	23.4 lbs. <i>(10.6kg)</i>

Winch & Hoist Mounting Brackets



- Carrying Bag for Portable Fall Arrest Post or Rescue/Material Handling Davit Arm (DH-AP-1/ or DH-AP-3/) DH-AP-1-3BAG/
- Carrying Bag for 14-in. (.36m) Extension Post (DH-AP-2/) DH-AP-2BAG/

SKU	Description	Weight
DH-AP-1-3BAG/	Carrying Bag	3 lbs. (1.4kg)
DH-AP-2BAG/	Carrying Bag	1.5 lbs. <i>(0.7kg)</i>

SKU	Description	Weight
DH-AP-11/	Complete Assembly of Adapter Plate (DH-AP-10/) and Bracket (DH-AB-MILLER/*) for mounting ManHandler Hoist/Winch or MightEvac SRL	2.7 lbs. (1.2kg)
DH-AP-10/	Adapter Plate for attaching Bracket (DH-AB-Miller/*) to Davit Arm (DH-AP-3/)	1.2 lbs. <i>(0.5kg)</i>
DH-AP-8/	Flat Quick-Mount Bracket	2.5 lbs. (1.1kg)
DH-AB-DBI/	Adapter Bracket for DBI Winch	1.8 lbs. <i>(0.8kg)</i>

* DH-AB-MILLER/ can be found on pg. 5

Miller ManHandler® Hoists



- The perfect solution for confined space entry, rescue, positioning and personnel/material handling. A secondary fall arrest system is recommended for fall protection.
- 350 lbs. (159kg) working capacity
- Compact, durable steel construction
- Effortless lifting and lowering with 5:1 gear ratio. Anti-backlash crank handle braking system.

Compatible with DuraHoist™ Portable Confined Space System & DuraHoist Rescue/Material Handling Davit Arm

SKU	Description	Weight
8442-Z7/65FT	ManHandler personnel-rated hoist w/65-ft. (20m) of 3/16-in. (4.76mm) galvanized steel cable	40.1 lbs. (18.2kg)
8442SS-Z7/65FT	ManHandler personnel-rated hoist w/65-ft. (20m) of 3/16-in. (4.76mm) stainless steel cable	37 lbs. (16.8kg)
8442-Z7/100FT	ManHandler personnel-rated hoist w/100-ft. (30m) of 3/16-in. (4.76mm) galvanized steel cable	46 lbs. (20.9kg)
8442SS-Z7/100FT	ManHandler personnel-rated hoist w/100-ft. (30m) of 3/16-in. (4.76mm) stainless steel cable	46 lbs. <i>(20.9kg)</i>

Miller MightyEvac[®] Self-Retracting Lifelines (SRL) w/Emergency Retrieval Hoist



- Combines the superior performance and reliability of the Miller MightyLite[™] SRL with a quick-activating retrieval mechanism for emergency evacuation.
- No annual factory recertification required*
 Significant long-term savings/lower cost of ownership
- 310 lbs. (141kg) weight capacity
- For emergency evacuation only

* Does not apply to Canada due to CSA Z259.2.2-98 requirements. Must be inspected by a Miller authorized service center if involved in a fall or it fails user visual or function inspection.

Compatible with DuraHoist Portable Confined Space System & DuraHoist Rescue/Material Handling Davit Arm

SKU	Description	Weight
MR50GB-Z7/50FT	Miller MightEvac SRL w/50-ft. (15m) of 3/16-in. (4.76mm) galvanized wire rope, mounting bracket & carabiner	39 lbs. (17.7kg)
MR50SB-Z7/50FT	Miller MightEvac SRL w/50-ft. (15m) of 3/16-in. (4.76mm) stainless steel wire rope, mounting bracket & carabiner	39 lbs. (17.7kg)
MR100GB-Z7/100FT	Miller MightEvac SRL w/100-ft. (30m) of 3/16-in. (4.76mm) galvanized wire rope, mounting bracket & carabiner	59 lbs. <i>(26.8kg)</i>
MR100SB-Z7/100FT	Miller MightEvac SRL w/100-ft. (30m) of 3/16-in. (4.76mm) stainless steel wire rope, mounting bracket & carabiner	59 lbs. <i>(26.8kg)</i>
MR130GB-Z7/130FT	Miller MightEvac SRL w/130-ft. (40m) of 3/16-in. (4.76mm) galvanized wire rope, mounting bracket & carabiner	64 lbs. <i>(29.0kg)</i>
MR130SB-Z7/130FT	Miller MightEvac SRL w/130-ft. (40m) of 3/16-in. (4.76mm) stainless steel wire rope, mounting bracket & carabiner	64 lbs. <i>(29.0kg)</i>

NOTE: All products include connectors with 3,600-lb. gate-strength



by Honeywell



LIMITLESS POSSIBILITIES. Ask the Expert.

Technical Service: 800.873.5242 • Customer Care: 800.430.5490 www.millerfallprotection.com

This equipment should only be used after reading and understanding the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.

LMDCSS

Lead them to safety. Build an enduring Culture of Safety where employees make safe choices on their own. www.honeywellsafety.com

Honeywell