



## Miller Twin Turbo™ Fall Protection Systems with G2 Connector



- An effective solution when working with low fall clearance
- Better alternative to double-leg lanyard
- PFLs swivel independently
- Lightest-weight Twin Connector on the market
- Quick and easy to install to maximize productivity

# MILLER®

by Honeywell

# Miller Twin Turbo™ Fall Protection Systems with G2 Connector

**New patent-pending Miller Twin Turbo™ G2 Connector provides 100% tie-off for the Miller TurboLite™ and Miller Turbo T-BAK™ Personal Fall Limiters (PFLs)**



**Webbing Retainer Clip  
rotates freely to prevent  
gate activation**

## Ultimate Performance and Safety

- Better alternative to double-leg lanyards – **Reduces fall clearance requirements** for use in more applications.
- PFLs swivel independently – **Provides ultimate worker mobility** and prevents webbing from twisting and binding in the unit.
- Lightest-weight Twin Connector on the market – **Increases productivity** by reducing worker fatigue.
- Superior durability – Corrosion-resistant aluminum connector teamed with high-impact nylon result in a **longer product life**.
- Superior safety – Webbing Retainer Clip rotates freely to prevent unintentional opening of carabiner gate during a fall **increases worker safety**.
- D-Pad Clip – **Maintains harness adjustment while working** by keeping the harness webbing and D-Pad in place.
- Twin Turbo G2 Connector **meets all applicable standards** including OSHA, ANSI and CSA.


## Increased Versatility

- Connects to harness webbing below the D-ring – **Frees harness D-ring for rescue and connection to an overhead Self-Retracting Lifeline**.
- Webbing Retainer Clip offers generous webbing slot – **Accommodates thicker webbing** designs for more versatility and **allows for easy insertion of webbing**.





MFLC-12-Z7/9FT



## Twin Turbo™ G2 Fall Protection Systems

MODEL	UNIT CONNECTOR	LANYARD END CONNECTOR
<b>6-FT. MODELS</b>		
MFLC-3-Z7/6FT	Twin Turbo G2 Connector	Steel Snap Hooks
MFLC-4-Z7/6FT	Twin Turbo G2 Connector	Steel rebar hooks
MFLC-6-Z7/6FT	Twin Turbo G2 Connector	Steel swivel rebar hooks
MFLC-11/6FT	Twin Turbo G2 Connector	Aluminum snap hooks
MFLC-12-Z7/6FT	Twin Turbo G2 Connector	Aluminum rebar hooks
<b>9-FT. MODELS</b>		
MFLC-3-Z7/9FT	Twin Turbo G2 Connector	Steel snap hooks
MFLC-11-Z7/9FT	Twin Turbo G2 Connector	Aluminum snap hooks
MFLC-12-Z7/9FT	Twin Turbo G2 Connector	Aluminum rebar hooks



MFLC-12-Z7/6FT

## Twin Turbo T-BAK™ G2 Fall Protection System

MODEL	UNIT CONNECTOR	LANYARD END CONNECTOR
MFLTC-1/7.5FT	Twin Turbo G2 Connector	Miller 5K® snap hooks



MFLTC-1/7.5FT

## Twin Turbo™ G2 Connector and Components


MODEL	DESCRIPTION
MFLC/	Twin Turbo G2 Connector Kit, includes MFLC-1, MFLC-2 and MFLC-3
MFLC-1/	Aluminum Carabiner, 3,600 lb. gate-strength
MFLC-2/	G2 Webbing Retainer Clip
MFLC-3/	G2 D-Pad Connector Clip



### Quick and Easy Installation

- 1 Connector gate opening is 88% larger than similar competitive products – Allows for **quick, easy installation**.
- 2 Smooth connector nose – **Prevents snagging on harness webbing** during installation.
- 3 D-Pad Clip – Provides a channel **for easier installation** of the Twin Turbo G2 Connector.



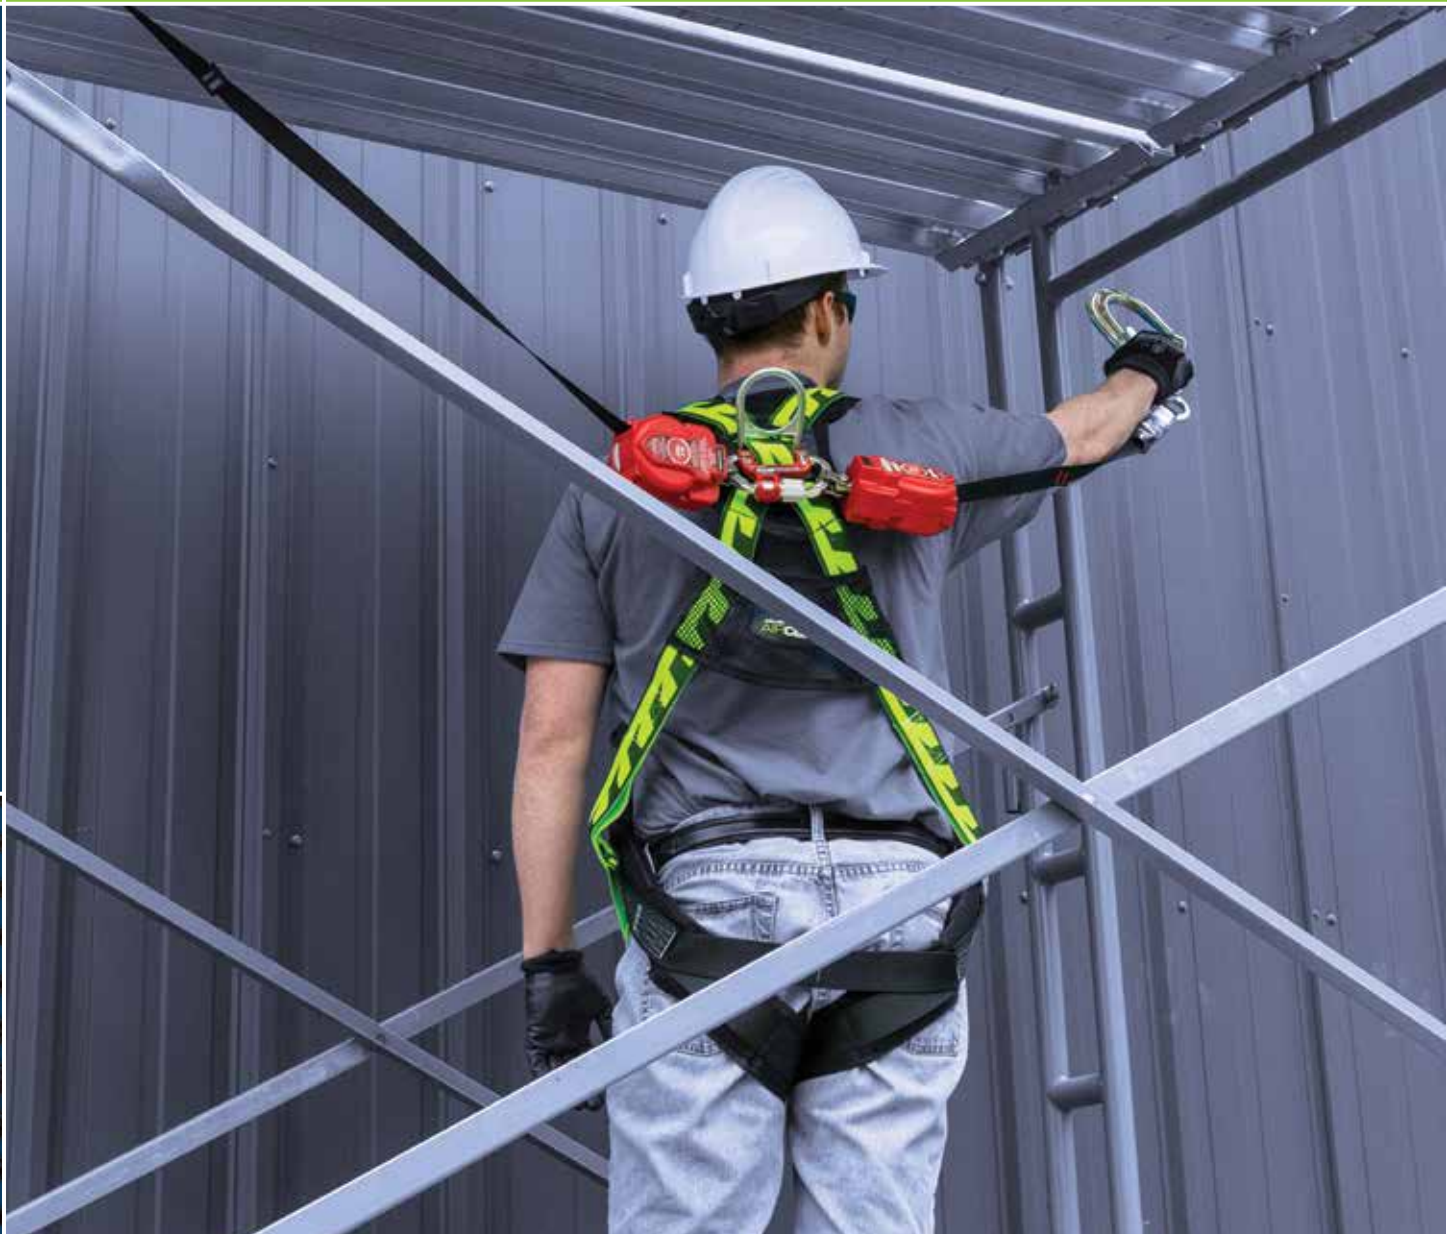


by Honeywell



**LIMITLESS POSSIBILITIES.** Ask the Expert.

Technical Service: 800.873.5242 • Customer Care: 800.430.5490

[www.millerfallprotection.com](http://www.millerfallprotection.com)

 *This equipment should only be used after reading and understanding the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.*

LMG2

**Lead them to safety.** Build an enduring Culture of Safety where employees make safe choices on their own.

[www.honeywellsafety.com/culture](http://www.honeywellsafety.com/culture)

**Honeywell**